



## Ventura County Community College District

761 E. Daily Drive, West Stanley Avenue, St. 200, Camarillo, CA 93010  
Purchasing Department

TO: All Jobwalk Attendees  
FROM: Janice Kisch, Purchasing Specialist  
SUBJECT: Bid 563, Oxnard College Gymnasium Fire Alarm Project

**July 19, 2018**

### **Bid 563, Oxnard College Gymnasium Fire Alarm Project – Addendum 1**

This addendum is hereby made a part of the contract documents to the same extent as though it was originally included therein and takes precedence over the original documents.

**Note that the Bid Proposal Form requires acknowledgement of receipt of all addenda.**

It is the responsibility of the Bidder to verify that their Bid Proposal and all addenda has been received and delivered to the VCCCD Purchasing Department prior to the bid opening date and time. Verification of receipt can be obtained through the listed Purchasing Specialist.

---

#### **New Information:**

1. **Original Fire Alarm Installation Plan Drawings** for the OC Gym are posted on the VCCCD Purchasing Website for reference. The two drawings are combined into one .pdf File.
2. **The Bid is to include the pricing and installation cost of 4 Duct detectors** as discussed on the Jobwalk. The addition of the Duct Detectors will be listed as Two Alternates on the Revised Bid Proposal Form. Alternate 1: is for the cost of installing new duct detectors that are compatible with the new FCI panel system to be installed. Alternate 2: is for the cost and installation of the supplied Innovair Duct Detectors ADS-RP that are listed on the inventory sheet, if compatible.
3. **Section 00210 Bid Proposal Form has been Revised and attached here.** The Revised Section 002100-1 Bid Proposal Form Dated R07/19/18 is to be used. This Section follows here and REPLACES the form in the original bid package posted. Be sure to use this form for the bid submittal.
4. **The Gym requires 2 new Intelligent Speaker Strobes** to be installed at the center-point of the wall length. Bidder is responsible for the conduit and peripherals needed for the installation.
5. **Fire Alarm Inspection Report and Failure Sheet is attached for review.** Equipment that has failed and noted on the report will need to be replaced with equipment that will tie in and be operational with the new system.

6. **The List of Equipment Inventory** on hand at Oxnard College Maintenance Department is below. This equipment may be used by the awarded bidder for this project as long as its compatibility and is fully operational with the upgraded FCI Control Panel System installed.

**Oxnard College Fire Alarm Parts Inventory:**

<b>Brand</b>	<b>Description</b>	<b>Model Number</b>	<b>Part Number</b>	<b>Quantity</b>
System Sensor SpectrAlert	Ceiling Mount Strobe	SC2415W	Not Available	18
System Sensor SpectrAlert	Ceiling Mount Strobe	SC24115W	Not Available	2
System Sensor SpectrAlert	Ceiling Mount Strobe	SC24175W	Not Available	7
System Sensor SpectrAlert	Ceiling Mount Strobe	SC2430W	Not Available	30
FCI / Innovair	Duct Photoelectric Smoke Detector w/sensor board	ADS-RP	Replaces DH500AC/DC Detector Head	24
FCI	Supplementary Notification Appliance; 6 Amp	SNAC-6	150-00011	6
FCI	Panel Box & Cover	Not Available	Not Available	2
Wheelock Inc.	Speakers w/grille	ET-1010-R	103135	8
	Fire Alarm Pull Box	Not Available	Not Available	8
FCI	7100 Series FA Control	FC7100 Transformer TXA	1120-0778	3

**General Notes:**

1. Bidders are responsible for accuracy of equipment, installation and its optimal operation with the new FSI control system. The project includes testing and verification of operation with all units installed and existing.
2. Project will be inspected for compliance by city Fire Marshall. Bidder is responsible for correcting any faulty units or areas of non-compliance.
3. Every existing Horn Strobe to be replaced with new Speaker Strobe throughout the building.

**BID PROPOSAL**

Section 00210-1

**TO:** VENTURA COUNTY COMMUNITY COLLEGE DISTRICT, a California Community College District, acting by and through its Board of Trustees ("District"), at 761 E. Daily Drive, Suite 200, Camarillo, CA 93010.

**FROM:** \_\_\_\_\_  
(Name of Bidder - as listed on license)  
\_\_\_\_\_  
(Address)  
\_\_\_\_\_  
(City, State, Zip Code)  
\_\_\_\_\_  
(Telephone) \_\_\_\_\_ (Fax)  
\_\_\_\_\_  
(E-Mail Address)  
\_\_\_\_\_  
(Name(s) of Bidder's Authorized Representative(s) and Title)

**1.01 Bid Proposal**

**A. Bid Proposal Amount**

Pursuant to and in compliance with the Notice to Contractors Calling for Bids, the Instructions for Bidders and the other documents relating thereto, the undersigned Bidder, having reviewed the Instructions for Bidders and all other Contract Documents and upon compliance with all requirements therein with reference to the submittal of this Bid Proposal, hereby proposes and agrees to perform the Contract including, without limitation, all of its component parts; to perform everything required to be performed; to provide and furnish any and all of the labor, materials, tools, equipment, applicable taxes, and services necessary to perform the work of the Contract in strict compliance with the Contract Documents and complete in a workmanlike manner all of the Work required for the Project described as:

**Bid 563, Oxnard College Gymnasium Fire Alarm Project**

**Base Bid Amount:** \$ \_\_\_\_\_  
(Total bid amount in figures)

\_\_\_\_\_  
(Total bid amount in words)

**Alternate #1 New Duct Detectors Amount (4 ea):** \$ \_\_\_\_\_  
(Total alternate amount in figures)

\_\_\_\_\_  
(Total alternate amount in words)

**Alternate #2 Supplied Duct Detectors Amount (4 ea.)** \$ \_\_\_\_\_  
(Total alternate amount in figures)

\_\_\_\_\_  
(Total alternate amount in words)

**B. Acknowledgment of Bid Addenda**

In submitting this Bid Proposal, the undersigned Bidder acknowledges receipt of all Bid Addenda issued by or on behalf of the District, as set forth below. The Bidder confirms that this Bid Proposal incorporates and is inclusive of, all items or other matters contained in Bid Addenda.

\_\_\_\_\_ **No Addenda Issued**  
(initial)

\_\_\_\_\_ **Addenda Nos. \_\_\_\_\_ received, acknowledged and**  
(initial) **incorporated into this Bid Proposal.**

**1.02 Rejection of Bid; Holding Open of Bid**

It is understood that the District reserves the right to reject this Bid Proposal and that this Bid Proposal shall remain open and not be withdrawn for the period of time specified in the Call for Bids, except as provided by law.

**1.03 Documents Comprising Bid Proposal**

The undersigned Bidder has submitted as its Bid Proposal the following: Bid Proposal (00210), List of Subcontractors (00215), Non-Collusion Affidavit (00220), Statement of Bidder’s Qualifications (00240), Bid Security (Cash, Cashier’s Check, Certified Check or Bid Bond (00260) and Verification of DIR Registration.

The Bidder acknowledges that if this Bid Proposal and the foregoing documents are not fully in compliance with applicable requirements set forth in the Call for Bids, the Instructions for Bidders and in each of the foregoing documents, the Bid Proposal may be rejected as non-responsive.

**1.04 Award of Contract**

It is understood and agreed that if written notice of the acceptance of this Bid Proposal and award of the Contract thereon is mailed or delivered by the District to the undersigned after the opening of Bid Proposals and within the time this Bid Proposal is required to remain open or at any time thereafter before this Bid Proposal is withdrawn, the undersigned will execute and deliver to the District the Agreement in the form attached hereto in accordance with the Bid Proposal as accepted within seven (7) calendar days after notification of acceptance and award. Concurrently with delivery of the executed Agreement to the District, the Bidder awarded the Contract shall deliver to the District: (1) the Labor and Material Payment Bond; (2) the Performance Bond; (3) the Drug-Free Workplace Certificate; (4) Certificates of Insurance evidencing all insurance coverages required to be provided under the Contract Documents; and (5) the Certificate of Workers’ Compensation Insurance. The Work under the Contract Documents shall be commenced by the undersigned Bidder, if awarded the Contract, on the date stated in the District's Notice to Proceed issued pursuant to the Contract Documents.

Completion of the Work and all Interim Milestones shall be achieved within the Contract Time and Interim Milestones specified in the Contract Documents.

**1.05 Notices**

All notices or other correspondence shall be addressed to the District and the Bidder at their respective addresses set forth herein. Notices shall be effective only if in writing and in conformity with the requirements for service of notices set forth in the Contract Documents.

**1.06 Contractor's License**

The undersigned Bidder is currently and duly licensed in accordance with the California Contractors License Law, California Business & Professions Code §§7000 et seq., under the following:

License Number: \_\_\_\_\_  
Class \_\_\_\_\_ Expiration Date \_\_\_\_\_ Class \_\_\_\_\_ Expiration Date \_\_\_\_\_  
Class \_\_\_\_\_ Expiration Date \_\_\_\_\_ Class \_\_\_\_\_ Expiration Date \_\_\_\_\_

DIR Registration Number: \_\_\_\_\_ Expiration Date: \_\_\_\_\_

By executing this Bid Proposal, the Bidder hereby certifies that: (a) it is duly licensed, in the necessary class(es), for performing the Work of the Contract Documents; (b) that such license shall be in full force and effect throughout the duration of the performance of the Work under the Contract Documents; and (c) that all Subcontractors providing or performing any portion of the Work of the Contract Documents shall be so similarly and appropriately licensed to perform or provide such portion of the Work.

**1.07 Designation of Subcontractors**

In compliance with the Subletting and Subcontracting Fair Practices Act (California Public Contract Code §§4100, et seq.) and amendments thereof, each Bidder shall set forth in the Subcontractors List: (a) the name and location of the place of business of each Subcontractor who will perform work or labor or render services to the Bidder in or about the construction of the Work to be performed under the Contract Documents in an amount in excess of one-half of one percent (0.5%) of the Bidder's Bid Proposal; and (b) the trade and/or portion of the Work which will be performed by each listed Subcontractor. The Bidder shall list only one Subcontractor for each trade and/or portion of the Work as is defined by the Bidder in its Bid Proposal. If a Bidder fails to list a Subcontractor for a portion of the work in excess of one-half of one percent (0.5%) of the Bidder's Bid Proposal or if the Bidder specifies more than one Subcontractor for the same portion of Work to be performed under the Contract Documents valued in excess of one-half of one percent (0.5%) of the Bidder's Bid Proposal amount, the Bidder shall be deemed to have agreed that it is fully qualified to perform that portion of the Work itself and that it shall perform that portion of the Work.

**1.08 Confirmation of Figures**

By submitting this Bid Proposal, the Bidder confirms that it has checked all of the above figures and understands that neither the District nor any of its agents, employees or representatives shall be responsible for any errors or omissions on the part of the undersigned Bidder in preparing and submitting this Bid Proposal. All amounts will be entered on the proposal in the written amount and listed in figures. In the event there is a discrepancy between the bidder's written amounts and figures, the written amount will prevail.

**1.09 Acknowledgment and Confirmation**

The undersigned Bidder acknowledges its receipt, review and understanding of the Drawings, the Specifications and other Contract Documents pertaining to the proposed Work. The undersigned Bidder certifies that the Contract Documents are, in its opinion, adequate, feasible and complete for providing, performing and constructing the Work in a sound and suitable manner for the use specified and intended by the Contract Documents. The undersigned Bidder certifies that it has, or has available, all necessary equipment, personnel, materials, facilities and technical and financial ability to complete the Work for the amount bid herein within the Contract Time and in accordance with the Contract Documents. The undersigned Bidder certifies that its bid amount includes funds sufficient to allow the Bidder to comply with all applicable local, state and federal laws and regulations governing the labor and services to be provided for the performance of the Work of the Contract and shall indemnify, defend and hold District harmless from and against any and all claims, demands, losses, liabilities and damages arising out of or relating to Bidder's failure to comply with applicable law in this regard.

By: \_\_\_\_\_  
(Signature & Date)

*(Corporate Seal)*

\_\_\_\_\_  
(Typed or Printed Name of Bidder's Authorized Representative)

Title: \_\_\_\_\_

Date: \_\_\_\_\_

*[End Of Section]*

## INSPECTION AND TESTING FORM

DATE: 7/18/18TIME: 12:30**SERVICE ORGANIZATION**Name: Integrated Fire and SafetyAddress: 1229 North Ventura AvenueRepresentative: Martin SabaneroLicense No.: C-10, C-16502754Telephone: (805) 648-5906**PROPERTY NAME (USER)**Name: Oxnard CollegeAddress: Gym Building - 40Owner Contact: DavidTelephone: 805-630-9164**MONITORING ENTITY**Contact: Localalarm

Telephone: \_\_\_\_\_

Monitoring Account Ref. No.: \_\_\_\_\_

**APPROVING AGENCY**Contact: N/A

Telephone: \_\_\_\_\_

**TYPE TRANSMISSION**

- McCulloh  
 Multiplex  
 Digital  
 Reverse Priority  
 RF  
 Other (Specify) \_\_\_\_\_

**SERVICE**

- Weekly  
 Monthly  
 Quarterly  
 Semiannually  
 Annually  
 Other (Specify) \_\_\_\_\_

Control Unit Manufacturer: FCICircuit Styles: Class BNumber of Circuits: 1 SLC / 8 NACSoftware Rev.: N/ALast Date System Had Any Service Performed: 3/30/17Last Date That Any Software or Configuration Was Revised: N/AModel No.: 7100**ALARM-INITIATING DEVICES AND CIRCUIT INFORMATION**

Quantity of Devices Installed	Circuit Style	Quantity of Devices Tested	
<u>24</u>	<u>Class B</u>	<u>22</u>	Manual Fire Alarm Boxes
<u>N/A</u>			Ion Detectors
<u>41</u>	<u>Class B</u>	<u>41</u>	Photo Detectors
<u>N/A</u>			Duct Detectors
<u>N/A</u>			Heat Detectors
<u>1</u>	<u>Class B</u>	<u>1</u>	Waterflow Switches
<u>6</u>	<u>Class B</u>	<u>6</u>	Supervisory Switches
<u>N/A</u>			Other (Specify): _____

Alarm verification feature is disabled  enabled \_\_\_\_\_.

FIGURE 10.6.2.3 Example of an Inspection and Testing Form.







**ALARM NOTIFICATION APPLIANCES AND CIRCUIT INFORMATION**

Quantity of Appliances Installed	Circuit Style	Quantity of Appliances Tested	
N/A			Bells
29	Class B	29	Horns
N/A			Chimes
26	Class B	26	Strobes
N/A			Speakers
			Other (Specify): <u>Horn / Strobes</u>

No. of alarm notification appliance circuits: 8

Are circuits monitored for integrity?  Yes  No

**SUPERVISORY SIGNAL-INITIATING DEVICES AND CIRCUIT INFORMATION**

Quantity of Devices Installed	Circuit Style	Quantity of Devices Tested	
N/A			Building Temp.
N/A			Site Water Temp.
N/A			Site Water Level
N/A			Fire Pump Power
N/A			Fire Pump Running
N/A			Fire Pump Auto Position
N/A			Fire Pump or Pump Controller Trouble
N/A			Fire Pump Running
N/A			Generator in Auto Position
N/A			Generator or Controller Trouble
N/A			Switch Transfer
N/A			Generator Engine Running
N/A			Other: _____

**SIGNALING LINE CIRCUITS**

Quantity and style of signaling line circuits connected to system (see NFPA 72, Table 6.6.1):  
 Quantity 1 Style(s) Class B

**SYSTEM POWER SUPPLIES**

(a) Primary (Main): Nominal Voltage 120v Amps 20a  
 Overcurrent Protection: Type Disconnect Amps 20a  
 Location (of Primary Supply Panelboard): Next to FACP  
 Disconnecting Means Location: LA1 - Circuit 13

(b) Secondary (Standby):  
N/A Storage Battery: Amp-Hr Rating 2-17 ah  
 Calculated capacity in 7 ah Amp-Hrs to operate system for N/A hours  
 Engine-driven generator dedicated to fire alarm system: N/A  
 Location of fuel storage: N/A

**TYPE BATTERY**

Dry Cell  Lead-Acid  
 Nickel-Cadmium  Other (Specify):  
 Sealed Lead-Acid

(c) Emergency or standby system used as a backup to primary power supply, instead of using a secondary power supply:  
N/A Emergency system described in NFPA 70, Article 700  
 \_\_\_\_\_ Legally required standby described in NFPA 70, Article 701  
 \_\_\_\_\_ Optional standby system described in NFPA 70, Article 702, which also meets the performance requirements of Article 700 or 701

FIGURE 10.6.2.3 Continued

<b>PRIOR TO ANY TESTING</b>				
<b>NOTIFICATIONS ARE MADE</b>	Yes	No	Who	Time
Monitoring Entity	<input checked="" type="checkbox"/>	<input type="checkbox"/>	All _____	8:30 _____
Building Occupants	<input checked="" type="checkbox"/>	<input type="checkbox"/>	All _____	8:30 _____
Building Management	<input type="checkbox"/>	<input type="checkbox"/>	N/A _____	_____
Other (Specify)	<input type="checkbox"/>	<input type="checkbox"/>	N/A _____	_____
AHJ Notified of Any Impairments	<input type="checkbox"/>	<input type="checkbox"/>	N/A _____	_____

<b>SYSTEM TESTS AND INSPECTIONS</b>			
<b>TYPE</b>	Visual	Functional	Comments
Control Unit	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Interface Equipment	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Lamps/LEDs	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Fuses	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Primary Power Supply	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Trouble Signals	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Disconnect Switches	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Ground-Fault Monitoring	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____

<b>SECONDARY POWER</b>			
<b>TYPE</b>	Visual	Functional	Comments
Battery Condition	<input checked="" type="checkbox"/>		Tested monthly. _____
Load Voltage		<input checked="" type="checkbox"/>	Results on battery. _____
Discharge Test		<input type="checkbox"/>	N/A _____
Charger Test		<input checked="" type="checkbox"/>	_____
Specific Gravity		<input type="checkbox"/>	N/A _____

<b>TRANSIENT SUPPRESSORS</b>	<input type="checkbox"/>		N/A _____
<b>REMOTE ANNUNCIATORS</b>	<input type="checkbox"/>	<input type="checkbox"/>	N/A _____

<b>NOTIFICATION APPLIANCES</b>			
<b>TYPE</b>	Visual	Functional	Comments
Audible	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	See attached failure sheet. _____
Visible	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____
Speakers	<input type="checkbox"/>	<input type="checkbox"/>	N/A _____
Voice Clarity		<input type="checkbox"/>	N/A _____

<b>INITIATING AND SUPERVISORY DEVICE TESTS AND INSPECTIONS</b>							
Loc. & S/N	Device Type	Visual Check	Functional Test	Factory Setting	Measured Setting	Pass	Fail
_____	SD	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input checked="" type="checkbox"/>
_____	WF	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	TS	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	MPS	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	DD	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input checked="" type="checkbox"/>
_____	N/A	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>

Comments: Hall horns & strobes do not work. Strobes out of sync.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

FIGURE 10.6.2.3 *Continued*

**EMERGENCY COMMUNICATIONS EQUIPMENT**

	Visual	Functional	Comments
Phone Set	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Phone Jacks	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Off-Hook Indicator	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Amplifier(s)	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Tone Generator(s)	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Call-in Signal	<input type="checkbox"/>	<input type="checkbox"/>	N/A
System Performance	<input type="checkbox"/>	<input type="checkbox"/>	N/A

**COMBINATION SYSTEMS**

	Visual	Device Operation	Simulated Operation
Fire Extinguisher Monitoring Device/System	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carbon Monoxide Detector/System	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
(Specify) <u>N/A</u>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**INTERFACE EQUIPMENT**

(Specify) <u>Fire Pump</u>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Specify) _____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
(Specify) _____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**SPECIAL HAZARD SYSTEMS**

(Specify) <u>N/A</u>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
(Specify) _____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Special Procedures: N/A

Comments: Fire Pump failed to operate when ITV was opened.

**SUPERVISING STATION MONITORING**

	Yes	No	Time	Comments
Alarm Signal	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Alarm Restoration	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Trouble Signal	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Trouble Signal Restoration	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Supervisory Signal	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Supervisory Restoration	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____

**NOTIFICATIONS THAT TESTING IS COMPLETE**

	Yes	No	Who	Time
Building Management	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>Brian</u>	<u>2:45</u>
Monitoring Agency	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____
Building Occupants	<input checked="" type="checkbox"/>	<input type="checkbox"/>	_____	<u>2:45</u>
Other (Specify)	<input type="checkbox"/>	<input type="checkbox"/>	<u>N/A</u>	_____

The following did not operate correctly: Horn & strobes.

System restored to normal operation: Date: 7/18/18 Time: 2:45

**THIS TESTING WAS PERFORMED IN ACCORDANCE WITH APPLICABLE NFPA STANDARDS.**

Name of Inspector: Martin Sabanero Date: 7/18/18 Time: 2:45  
 Signature: \_\_\_\_\_  
 Name of Owner or Representative: \_\_\_\_\_ Date: \_\_\_\_\_ Time: \_\_\_\_\_  
 Signature: \_\_\_\_\_

FIGURE 10.6.2.3 Continued

# INTEGRATED FIRE & SAFETY

1229 North Ventura Avenue  
 Ventura, CA 93001  
 (805) 648-5906 fax (805) 648-5905

CONT. LIC. #C10-C16-502754

## FIRE ALARM SYSTEM TESTING FAILURES AND COMMENTS

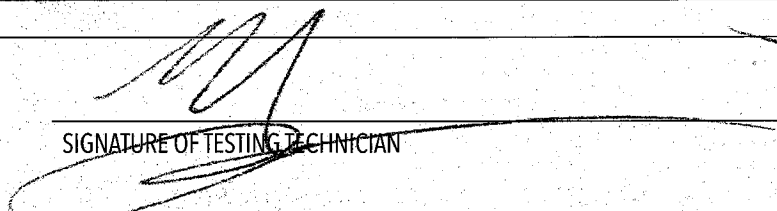
DATE: 7/18/18 TECHNICIANS: Martin Schiano / Brian Sockwell

THE FOLLOWING IS A LIST OF DISCREPANCIES FOUND DURING TESTING AT: OXNARD college @ Gym Building


WORK ORDER NUMBER: 33885 REPAIR WORK ORDER NUMBER: \_\_\_\_\_

DEVICE NUMBER	DEVICE TYPE	LOCATION	REASON FOR FAILURE	MFG & PART NUMBER	DATE REPAIRED	DATE REQUESTED
	SD	MENS/WOMENS TEAM ROOM	NO ALARM TO PANEL (Simplex)	Simplex		
	SD	MENS/WOMENS TEAM ROOM	NO ALARM TO PANEL (Simplex)	Simplex		
	HD	MEZZANINE LOBBY	NO ALARM TO PANEL ?	Simplex		
	NACS	All Corridors	NO NAC ACTIVATION.			
	NACS	Classrooms	spontaneous output			
	BELL	O/S FACP ROOM	SD NOT ACTIVATE ON FLOW.			
	NACS	Gym ceiling	SPEAKERS MOUNTED BELOW STROBES.			
	DUCT DET	MEZZANINE	NOT TIED TO FACP OR LOCAL SHUTDOWN	(Simplex)		

COMMENTS: NO 5 year TAG ON RISER

SIGNATURE OF TESTING TECHNICIAN: 

SIGNATURE OF TESTING TECHNICIAN: \_\_\_\_\_

CUSTOMER SIGNATURE: 

CUSTOMER SIGNATURE: \_\_\_\_\_